# Exhaust Temperature Probe - 90° Bend - 1/8" O.D.

## **Fast Response EGT Temperature Probe**

- Type K thermocouple probe
- Exposed sensing junction for fastest response
- Includes 316 SS adjustable compression fitting
- Stainless steel protected wires
- Designed for engine test & racing environments

## **Specifications**

Thermocouple type:

-148 to 2372°F (-100 to 1300°C) Range:

Accuracy: +/-0.4% of reading or about +/- 1.1°C (Special Limits of Error)

Probe diameter: 1/8 inch (0.125 inch) (3.17 mm)

Exposed, Ungrounded Sensing Junction:

Response Time\*: 250 mS

\*Time Constant: Defined as the time required to reach 63.2% of an instantaneous temperature change


Five time constants are required to approach 100% of the step change value

Outer Sheath Material: Inconel, melting point 2550°F (1400°C)

Cable: Stainless steel overbraiding over Teflon™ insulated, stranded wires, 20 gage


316 stainless steel, adjustable, 1/8 inch -27 NPT male thread Compression Fitting:

+ = Yellow - = Red Wiring:

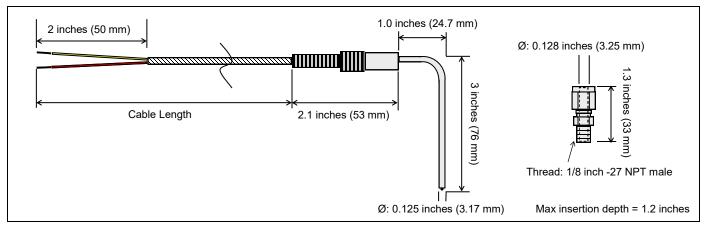

### **Ordering Information**

| Model  | Cable Length                                  |       |     | Connector   |
|--------|---|-------|-----|---|
| EGT-AP |   | -0181 | -SS |   |
|        | 72 inches<br>144 144 inches<br>300 300 inches |       |     | N No connector MP Male mini-plug SP Standard plug |



#### **Ordering Example**

EGT-AP-072-0181-SS-N: 72 inch long cable, Type K thermocouple, no connector



42690 Woodward Avenue, Suite 200 . Bloomfield Hills, MI 48304 USA Phone: 248-636-1515 • Fax: 248-636-4969